



Inside of carry bag



Two sets Support bars

Bottom frame

Top frame

2 ropes

1 Air Pump

2 tires

You can find these items

Setup: Put top and bottom frames on the floor. Then connect BungeeLink parts together like far right picture shows.



BungeeLink

All the folding parts are linked with bungee cords

www.dogagilityobstacles.com



Everything folds up into this carry bag



#7517A Agility Tire Jump




You can easily put them together like this picture shows. Then connect top and bottom frames together.



See enlarged pics of connection. And put legs in their connected positions following BungeeLinks



Now we can lift the frame upright on the floor like this. Put all legs into positions.

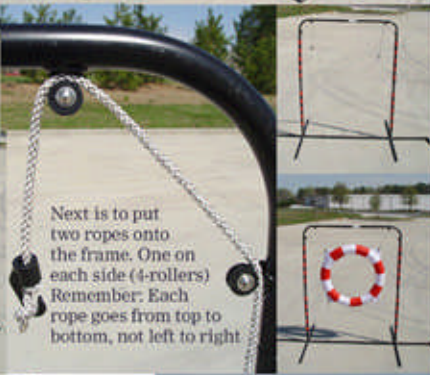

Next is to put two ropes onto the frame. One on each side (4-rollers) Remember: Each rope goes from top to bottom, not left to right



You can adjust tire's height simply by moving the tire up and down.



You can make knots on the end of the rope to adjust the tightness of the rope.

Bar Support Setup:

This tire jump set can use two bars to hold tire on the frame. If dog hits it, tire falls. For this setup just turn the bar holding pieces on each side toward center. Connect bars together and put them through the grommets on tire. Then put bars on the frame where the height is desired.



Bar holding setup

